





## COLD CARBONATED BEVERAGE DISPENSER


# CED 400

Type: Counter electric dispenser (CED) — narrow-width, 2/3/4 valve  
Cooling: Internal cold carbonation, R290 refrigerant, 1/3 hp compressor  
Item reference: 385-05004X

Spec reference:  
Lancer Worldwide

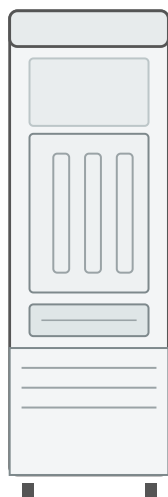

FRONT

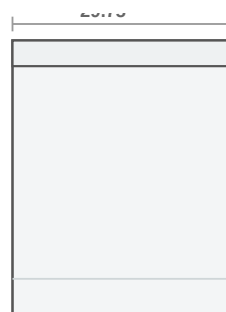

SIDE

### TECHNICAL VIEWS

#### ▼ TECHNICAL SPECIFICATIONS

|                                     |                                                    |
|-------------------------------------|----------------------------------------------------|
| <b>Valve Configuration</b>          | 2, 3, or 4 low-pressure valves (LPV)               |
| <b>Cooling / Carbonation</b>        | Internal cold carbonation, R290 refrigerant        |
| <b>Dimensions (W × D × H)</b>       | 10.83" × 29.75" × 32.60"<br>275 × 756 × 828 mm     |
| <b>Weight — Empty</b>               | 127 lb (57.6 kg)                                   |
| <b>Weight — Operating</b>           | 174 lb (78.9 kg)                                   |
| <b>Weight — Shipping</b>            | 165 lb (74.8 kg)                                   |
| <b>Ice Bank Capacity</b>            | 14 lb (6.4 kg)<br>Ice bath weight: 47 lb (21.3 kg) |
| <b>Compressor</b>                   | 1/3 hp                                             |
| <b>Electrical — 115V</b>            | 115 VAC / 60 Hz · 9.5 A · 285 W                    |
| <b>Electrical — 220–240V / 50Hz</b> | 220–240 VAC / 50 Hz · 6.0 A · 450 W                |
| <b>Electrical — 220–240V / 60Hz</b> | 220–240 VAC / 60 Hz · 6.0 A · 400 W                |
| <b>Carb Water Inlet</b>             | 3/8" (9.5 mm) barb                                 |
| <b>Plain Water Inlet</b>            | 3/8" (9.5 mm) barb                                 |
| <b>Brand Syrup Inlets</b>           | 1/4" (6.35 mm) barb                                |
| <b>CO2 Inlet</b>                    | 1/4" (6.35 mm) barb                                |

#### ▼ GENERAL FEATURES

- Narrowest 2–4 valve dispenser in its class — 10.8" (275 mm) width
- Eco-friendly R290 refrigerant with reduced energy consumption
- Available with 2, 3, or 4 low-pressure valves (LPV)
- Consistent internal cold carbonation
- Removable refrigeration deck for ease of service
- Stainless steel cabinet construction
- Electronic ice-bank level control
- 1/3 hp compressor
- Flexibility to serve carbonated and non-carbonated beverages

#### ▼ OPTIONS & ACCESSORIES

- Illuminated LED merchandiser panel
- Outage indicator lights (CO2, syrup, water)
- Internal mini syrup pumps



GAS R-290



COLD  
CARBONATION



ENERGY  
SAVING



NARROW  
FOOTPRINT